



LITHIUM IRON PHOSPHATE (LiFePO<sub>4</sub>)

RECHARGEABLE BATTERIES  
DEEP CYCLE



---

# 12V LITHIUM IRON PHOSPHATE BATTERY PACK

**MBL12-7**  
**12V 7Ah 85Wh**



# Contents

|  |   |
|--|---|
| 1. Summary.....                            | 3 |
| 2. Technical Specification.....            | 3 |
| 2.1. Battery Pack Specification .....      | 3 |
| 2.2. Protection Board Specification .....  | 4 |
| 3. Battery Pack Structure Description..... | 5 |
| 3.1. Cell Module .....                     | 5 |
| 3.2. Protection Board.....                 | 5 |
| 3.3. Shell .....                           | 5 |
| 3.4. Using .....                           | 5 |
| 4. Appearance.....                         | 6 |
| 4.1. View .....                            | 6 |
| 4.2. Dimensional drawing .....             | 6 |
| 5. Storage and Transportation .....        | 7 |
| 5.1. Storage .....                         | 7 |
| 5.2. Transportation .....                  | 7 |
| 6. Warning and Tips.....                   | 7 |



## 1. Summary

This 12V Lithium Iron Phosphate battery pack is widely used in Energy Storage System, Instrument, Medical Equipment, Financial/Commercial Equipment, Security/Electric Power Equipment, Robot etc. It could replace 12V Lead Acid battery pack, it is environmentally-friendly, and with long service life. This article mainly describes its appearance, size, electrical specifications, warning and tips, etc.

## 2. Technical Specification

### 2.1. Battery Pack Specification

| No. | Item                        | Unit | Value                  | Remark   |
|-----|-----------------------------|------|------------------------|--|
| 01  | Cell Model                  | -    | Cylinder Cell 3.2V 4Ah |  |
| 02  | Combination Mode            | -    | 2P4S                   |  |
| 03  | Nominal Capacity            | Ah   | 7                      |  |
| 04  | Rated energy                | Wh   | 85                     |  |
| 05  | Initial Internal Resistance | mΩ   | <150                   | AC 1KHz  |
| 06  | Rated Voltage               | V    | 12.8                   |  |
| 07  | Charge Cut-off Voltage      | V    | 14.6                   | Unit cell max. charge voltage not exceed 3.65V       |
| 08  | Discharge Cut-off Voltage   | V    | 10                     | Unit cell min. discharge voltage not lower than 2.5V |
| 09  | Standard Charge Current     | A    | 1.6                    | 0.2C   |
| 10  | Max. Charge Current         | A    | ≤8                     | 1C   |
| 11  | Standard Discharge Current  | A    | 4                      |  |
| 12  | Max. Discharge Current      | A    | ≤10                    |  |
| 13  | -20°C Discharge Capacity    |      | ≥65% Nominal Capacity  |  |
| 14  | Cycle life                  | -    | ≥1500 times            | DOD>80%  |
| 15  | Operating Temperature       | °C   | -0~+50°C               | Charge   |
|     |                             |      | -20~ +55°C             | Discharge  |
| 16  | Open Circuit Voltage        | V    | 12.8-13.6              |  |
| 17  | Shell type                  | -    | ABS Plastic Shell      |  |
| 18  | Weight                      | kg   | 0.8                    | About  |
| 19  | Dimension                   | mm   | 150(L)*65(W)*94(H)     | Exclude wiring terminal                              |


**2.2. Protection Board Specification**

| No. | Item  | Unit | Value                                    | Remark                   |
|-----|---|------|--|--------------------------|
| 01  | Overcharge Protection Voltage               | V    | 3.9V±25mV                                | Single Series Protection |
| 02  | Overcharge Protection Release Condition     | V    | 3.8V±50mV                                |                          |
| 03  | Over Discharge Protection Voltage           | V    | 2.5±80mV                                 | Single Series Protection |
| 04  | Over Discharge Protection Release Condition | V    | 3.0±100mV                                |                          |
| 05  | Discharge Over Current Protection           | A    | 50-80                                    |                          |
| 06  | Discharge Over Current Delay Time           | mS   | 900-1600                                 |                          |
| 07  | Discharge Over Current Release Condition    | -    | Cut off load                             |                          |
| 08  | Short Circuit Protect Condition             | -    | External Short Circuit                   |                          |
| 09  | Short Circuit Protect Delay Time            | uS   | 300-600                                  |                          |
| 10  | Short Circuit Protect Release Condition     | -    | After cutting off load, switch activate. |                          |
| 11  | High Temperature Protect                    | °C   | 70±5°C                                   | -                        |
| 12  | High Temperature Protect Release Condition  | °C   | 50±14°C                                  |                          |



### 3. Battery Pack Structure Description

#### 3.1. Cell Module

This 2P4S cell module is made by 8pcs Cylinder Lithium Iron Phosphate Cell

#### 3.2. Protection Board


It protects and manages the battery's charge and discharge, provides protection against overcharge, over discharge, current overload, high temperature, short circuit, and could achieve cell balance.

#### 3.3. Shell

ABS plastic shell, standard size shell, convenient to replace.

#### 3.4. Using

Allow series with maximum 4 packs. Each pack should be charged fully before series.

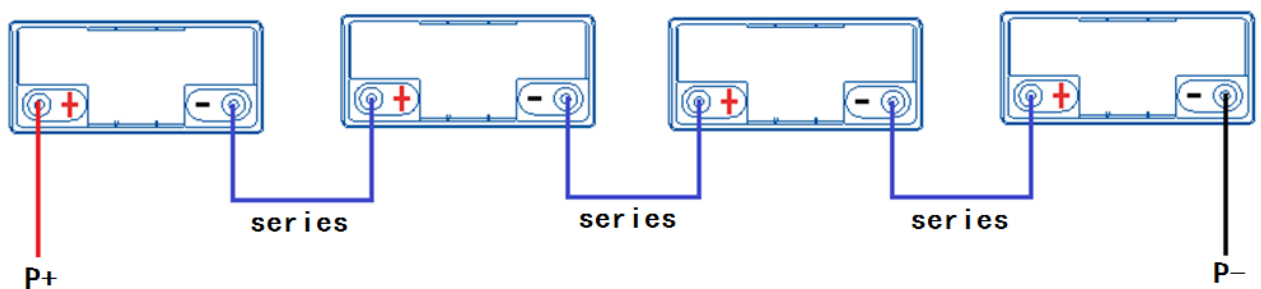




## 4. Appearance

### 4.1. View



### 4.2. Dimensional drawing

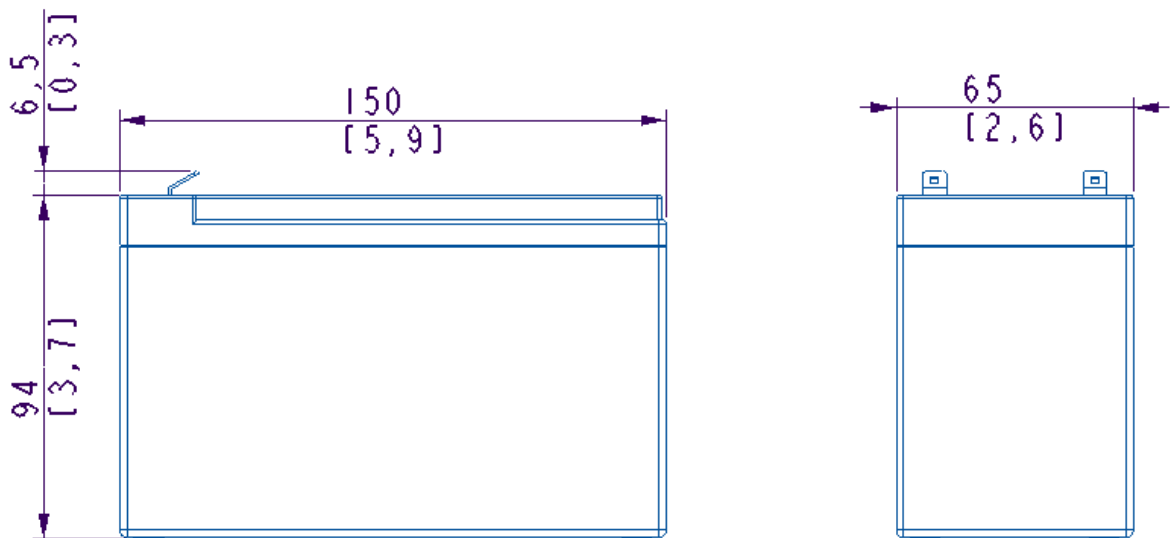



## 5. Storage and Transportation

### 5.1. Storage

When the product is not in use for a long time, please put it in a dry and ventilated place to avoid inflammable and explosive articles; charge and maintain the battery pack regularly every three months to ensure that the battery is in the best performance state.

### 5.2. Transportation

Battery pack should be packed with outer packing before they can be transported. In the course of transportation, severe shock, shock or extrusion should be prevented, and sunshine and rain should be prevented.

## 6. Warning and Tips

6.1. Never put batteries in water or wet them.

6.2. It is forbidden to charge and use batteries outside the temperature range we prescribe. Do not store, charge and use this product near the source of fire or heat.

6.3. When the battery pack emits odor or leaks, it should stop using or charging immediately, and move to an open ventilated place, away from the source of fire, and contact us in time.

6.4. Do not connect the positive and negative poles in connection with the load.

6.5. Do not short-circuit the positive and negative poles of the battery pack with metal conductors

6.6. Do not put the battery pack into the fire or heat it.

6.7. It is strictly forbidden to dissect the battery pack artificially, to pierce the battery pack with nails or sharp objects, to strike the battery pack with hammers or other external forces, and to trample and drop the battery pack artificially.

6.8 It is strictly forbidden to put batteries in microwave ovens or pressure vessels.

6.9 If any abnormal phenomena occur during charging or using, please stop charging and using immediately.

6.10 The optimum operating temperature of the product is  $25\pm 5^{\circ}\text{C}$ . If the product is not in this temperature range in the course of using, the discharge capacity will be reduced.

6.11 If any malfunction or abnormality occurs during the use, please contact us and do not disassemble the battery pack without permission.

6.12 The above test is for new batteries whose arrival time is not more than one month.