


► Product Appearance




► Product Size

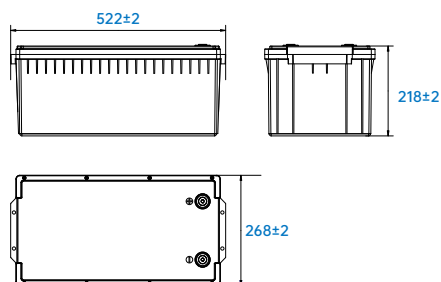

Net Weight: 22.6±0.5kg

► Packaging Size

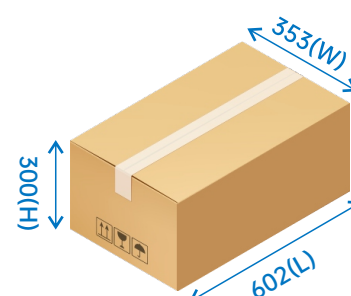

Gross Weight: 25.1±0.5kg


► Features

- A grade brand new prismatic LiFePO₄ cells
- >6000 cycles @80% DOD(25°C, 0.5C)
- Over charge, over discharge, over temperature, low temperature, over current and short circuit protection
- Easy installation and maintenance free
- Cell balance function
- ABS Case, corrosion and high temperature resistance
- Certificate: UN38.3, MSDS, IEC62619, CE-RED, ROHS
- Max 2 battery packs in series/Max 4 battery packs in parallel


► Electrical Characteristics

Model	LFP2.56KWH25.6V-P65L2EV50
Electrical Parameter	
Battery Type	LiFePO ₄
Nominal Voltage (V)	25.6
Nominal Capacity (Ah)	100
Energy (Wh)	2560
Pack Mode	8S1P
Continuous Discharge Current (A)	50
Charge Cut-off Voltage (V)	28.8
Discharge Cut-off Voltage (V)	20.8
Max.Charge Current (A)	100
Max.Discharge Current (A)	150
Recommend Discharge Current (A)	50
Recommend Discharge Depth (%)	80
Cycle Life	> 6000 cycles (25°C, 0.5C) 80% DOD
Function	Bluetooth,heating
Environmental Parameter	
Charge&Discharge Temperature (°C)	Charge: 0°C~+55°C / Discharge: -20°C~+60°C
Optimal Storage Temperature (°C)	5°C ~ +35°C
Relative Humidity	40%~80%
Ingress Protection	IP65
Mechanical Parameter	
Terminal	M8
Dimensions (L*W*H) (mm)	522*268*218
Weight (Kg)	22.6±0.5
Certificate	UN38.3, MSDS, IEC62619, CE-RED, ROHS


Different Rate Discharge Curve@25°C

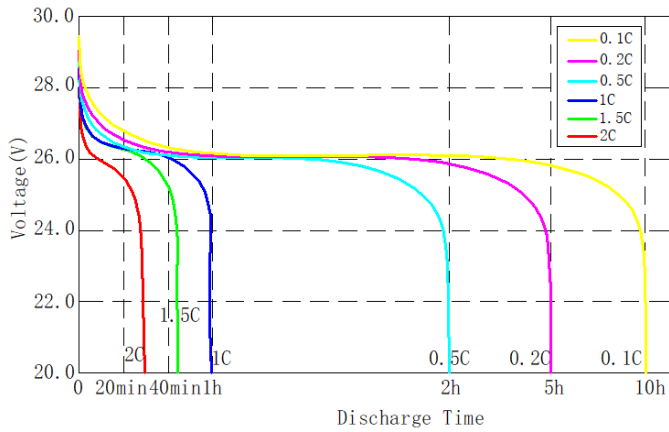


Different Temperature Discharge Curve@0.5C

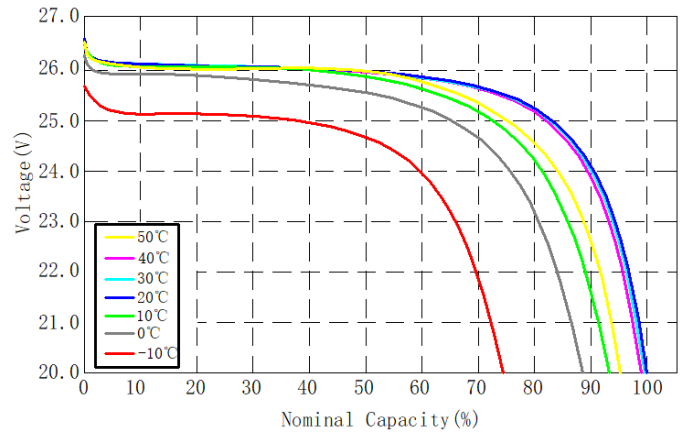


State of Charge Curve@0.5C 25°C

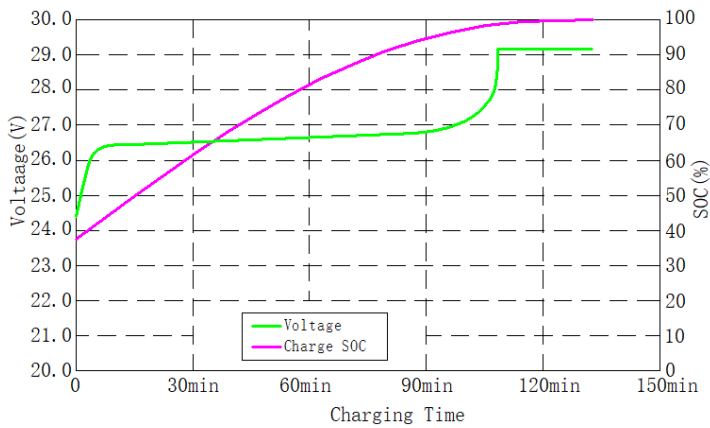

Charging Characteristics @0.5C 25°C

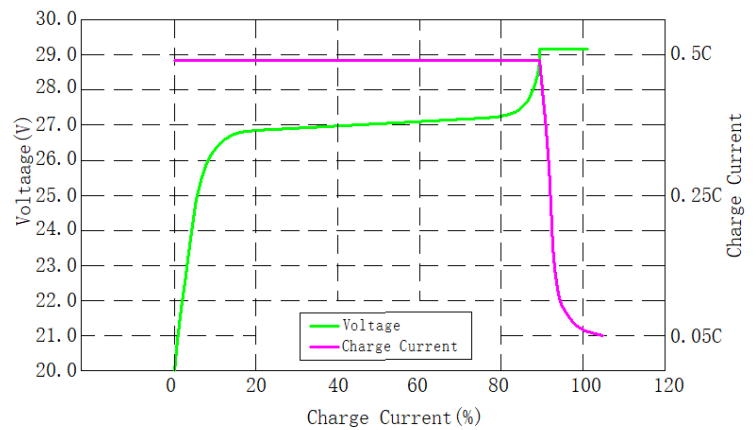

Different DOD Discharge Cycle Life Curve@0.5C 25°C

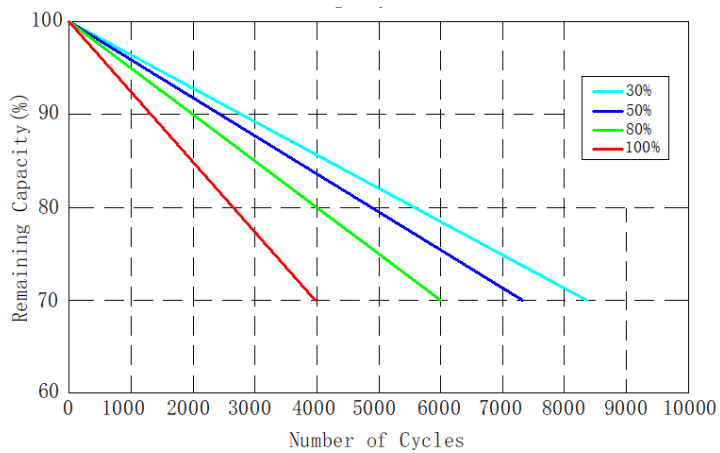

Different Temperature Self Discharge Curve

