Datasheet

intAct AGM-Power - Marine & Leisure

Sealed AGM battery with grid plates | electrolyte fixed in fleece | filled and charged | absolutely maintenance-free

Art.No.

AGM100

Volt	12V
Capacity	85 Ah (c5), 100 Ah (c20), 120 Ah (c100)
CCR -18°C (EN)	-
Electrolyte	diluted sulphuric acid
Electrolyte density	1,28 +/- 0,01 Kg/l (25° C)
Size (LxWxH)	358 x 175 x 233 mm
Weight	32,2 kg
Pos. of Terminal	**0**
Terminal	**1**
Bodenleiste	**B13**

Usage

Maintenance-free all-round

Completely sealed maintenance-free and leak-proof, therefore well suited for the interior. Uncomplicated power supply for hobby and leisure-time pursuits and smaller solar applications. Our recommendation for those looking for an affordable sealed supply battery.

- **300 charging cycles according to IEC 254-1.**
- **Longer service life** than flooded lead-acid battery.
- **Low self-discharge.**
- **VRLA battery with gas recombination and safety valves**, where refilling is neither possible or necessary.
- **Sealed AGM battery with grid plates.**
- **Leak-proof.** Can also be installed at an angle, as the electrolyte is absorbed in glass fibre mats and the battery is tightly sealed.

Size



Pos. of Terminal 0



Terminal 1

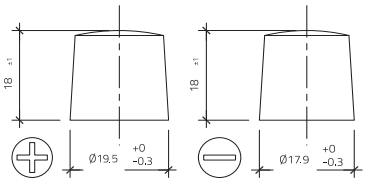

Bodenleiste B13

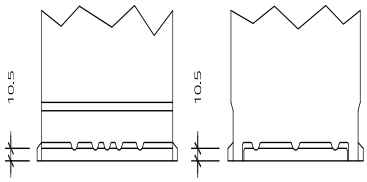

As of 10.12.2025

KECKEISEN AKKUMULATOREN
Stefan Keckeisen Akkumulatoren e.K.
Europastraße 9
87700 Memmingen
Fon +49(0)8331 94444-0
Fax +49(0)8331 94444-9
info@intact-batterien.de
www.intact-batterien.de